






# MIL-DTL-38999 Series III

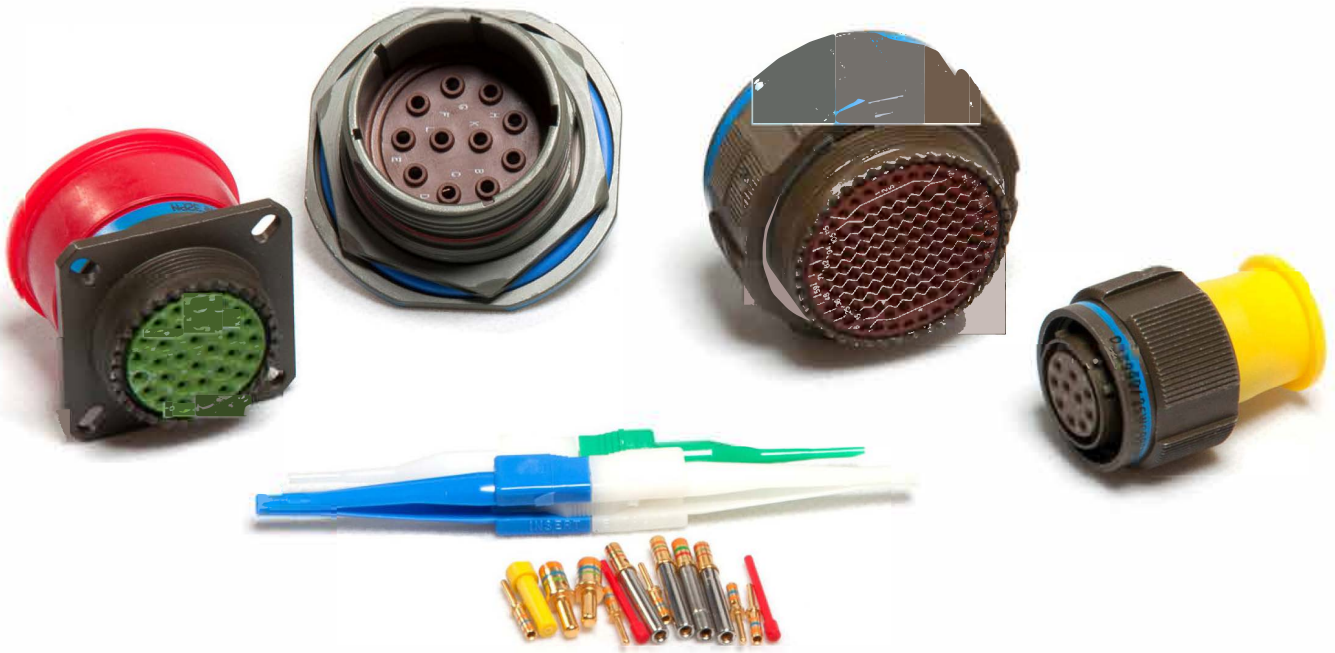


**dosinconn** | 德索连接器  
连接器 & 线材定制 | www.dosinconn.cn

**Circular Connectors**

Technical drawing details include:  
- Dimensions:  $13,50 \pm 0,6$ ,  $913 \pm 0,11$ ,  $23,19 \pm 0,28$ ,  $0,93 \pm 0,06$ ,  $2,36 \pm 0,15$ ,  $17,30 \text{ max.}$   
- Labels:  $\varnothing R$ ,  $\varnothing S$ , B THREAD, P, C1, C2, B

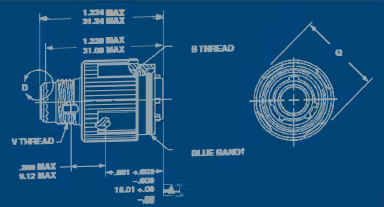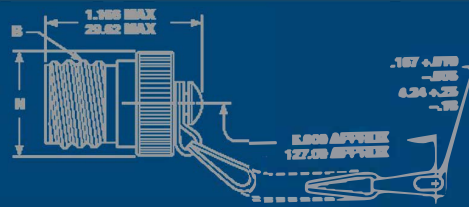


## How To Order

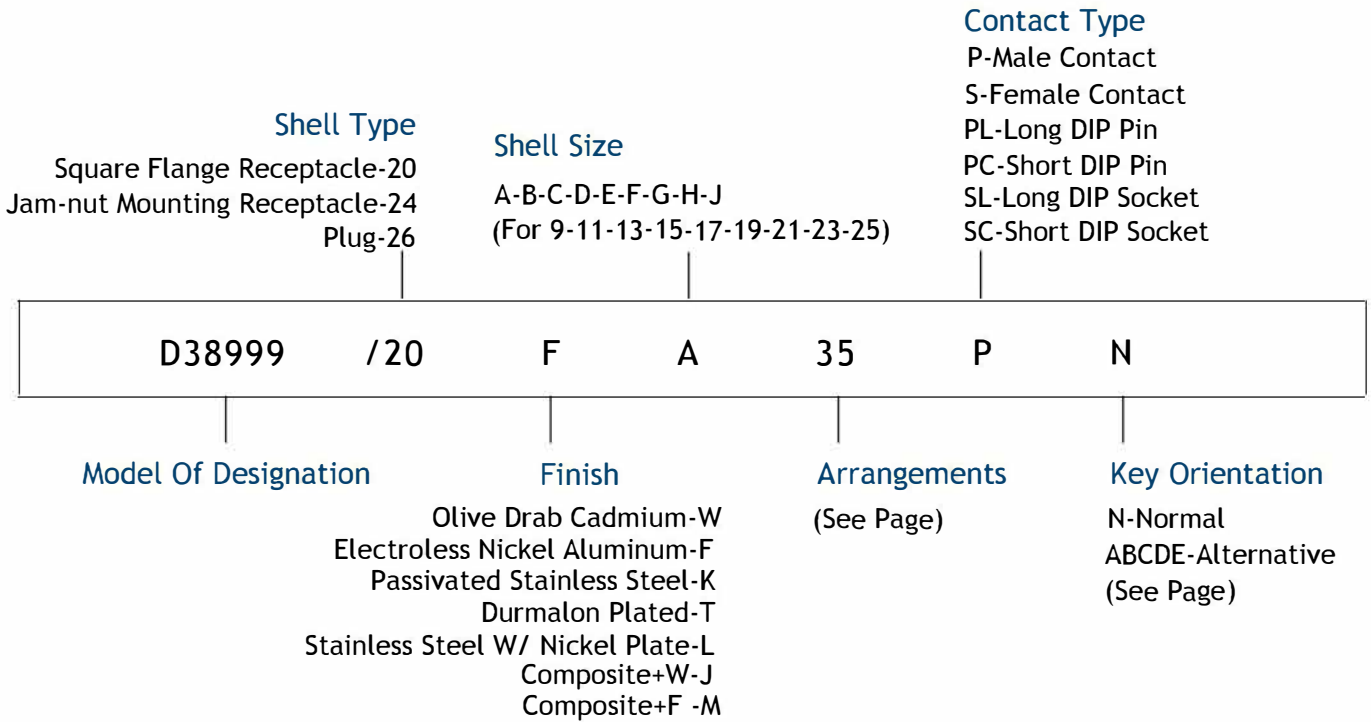

### ■ Plug

### ■ Sealed receptacles

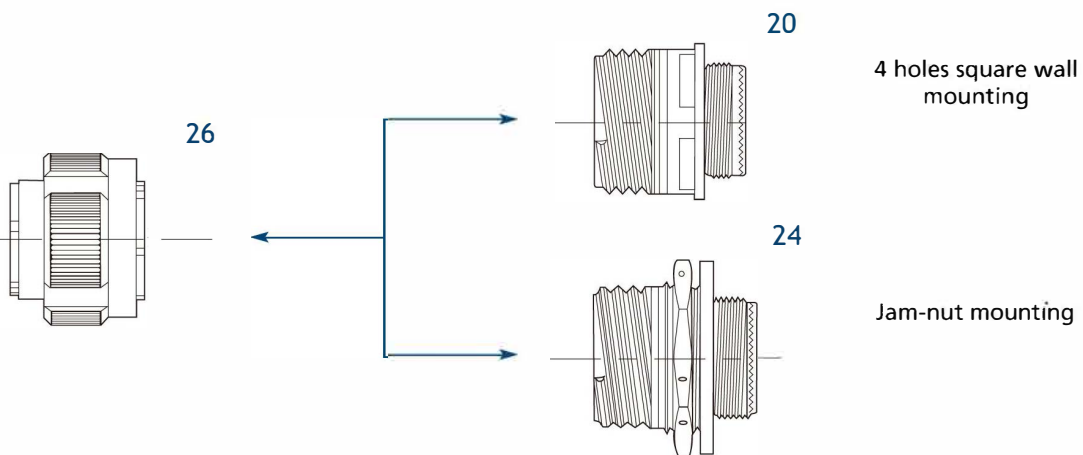



## Technical Characteristics

### Mechanical

Shell	Material	Sealed version	: Aluminium alloy , Composite
	Plating	Hermetic version	: Stainless steel
RFI ring	Material	Sealed version	: Beryllium copper
		Hermetic version	: Nickel/cadmium
Insert	Material	Sealed version	: Thermoplastic and fluorinated silicone elastomer
		Hermetic version	: Sintered glass insert
Flat gasket and 'o'ring	Material		: Fluoronited silicone elastomer
Contacts	Material	Sealed version	: Copper alloy
		Hermetic version	: Ferrous alloy
Retention	Plating	Sealed version	: Gold
		Type	Sealed version : Crimp type or pcb (consult us) Hermetic version : Solder type or pcb (consult us)
Vibrations	Physical shocks	Size 22 D	: 4,5 N
		Size 12	: 11,1 N
Durability		Size 20	: 6,7 N
		Size 8	: 11,1 N
		Size 16	: 11,1 N
		: As per MIL-DTL-38999	
		: 300 g, 3 ms in the 3 axes	
		: 500 coupling and uncoupling cycles	



### Environmental conditions

Service temperature	Sealed version	: Cadmium plating - 65° C to + 175° C Nickel plating - 65° C to + 200° C
	Hermetic version	: Passived plating - 65° C to + 200° C
Thermal shocks		: As per MIL-DTL-38999
Sealing		: Leakage ≤ 16 cm <sup>3</sup> /h on mated connecting under 2.1 bars
Air leakage	Hermetic version	: ≤ 1.10·10 <sup>-6</sup> mbar. l/s under 1 bar vaccum
Salt spray resistance	Sealed version	: 500 hours class W and K, as per MIL-DTL-38999
		: 48 hours class F and L , as per MIL-DTL-38999


### Electrical

Withstanding voltage	At sea level	: Service M : 1300 V Service I : 1800 V Service II : 2300 V
	At 70 000 ft altitude	: Service N : 1000 V Unmated connector Service M : 800 V Service I : 1000 V Service II : 1000 V Service M : 200 V Service I : 200 V Service II : 200 V
Insulation resistance		: ≥ 5000 MΩ to 25° C and 65 % HR max.
Voltage drop		: Size 22 : test to 5 Amp. = 73 millivolts max.
		: Size 20 : test to 7,5 Amp. = 55 millivolts max.
		: Size 16 : test to 13 Amp. = 49 millivolts max.
		: Size 12 : test to 23 Amp. = 42 millivolts max.
		: Size 8 : test to 46 Amp. = 26 millivolts max.
Shielding		: As per MIL-DTL-38999

Size	Contacts current		Diameter over insulation sheath in mm	Permitted wire Section in mm <sup>2</sup>
	Sealed version	Hermetic version		
22	5 A	3 A	0,76 to 1,37	0,095 to 0,38
20	7,5 A	5 A	1,01 to 2,10	0,21 to 0,60
16	13 A	10 A	1,65 to 2,77	0,60 to 1,34
12	23 A	17 A	2,46 to 3,61	1,91 to 3,18
8	46 A	40 A	4,50 to 5,80	5,30 to 8,98

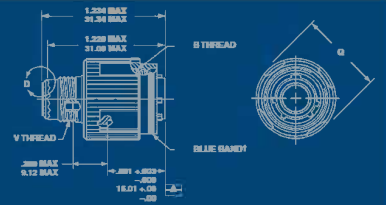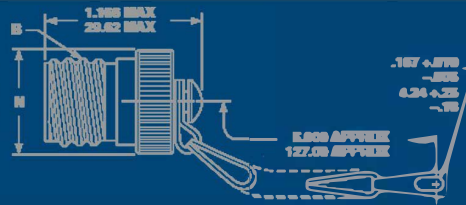


**Plug (D38999/26)**

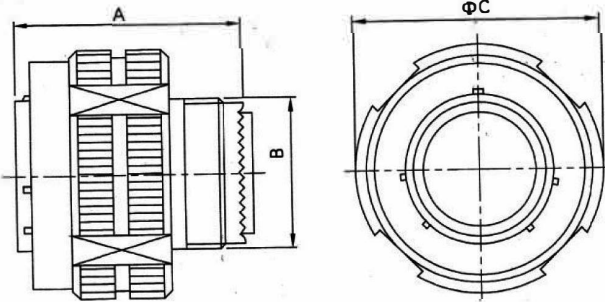


Shell Size	A (max)	B Thread	C (max)
09	31.00	M12*1-6g	21.80
11	31.00	M15*1-6g	25.00
13	31.00	M18*1-6g	29.40
15	31.00	M22*1-6g	32.40
17	31.00	M25*1-6g	35.60
19	31.00	M28*1-6g	38.50
21	31.00	M31*1-6g	41.70
23	31.00	M34*1-6g	44.90
25	31.00	M37*1-6g	48.00

**Square Flange Receptacle (D38999/20)**

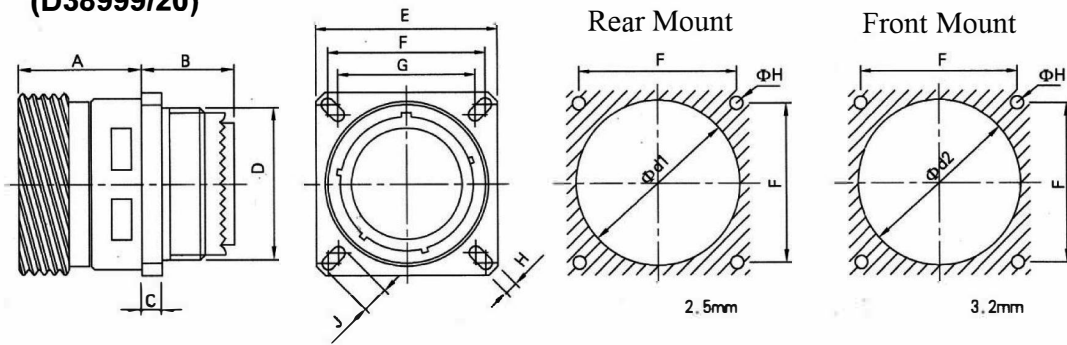


Panel Thickness(max) 2.5mm Panel Thickness(max) 3.2mm

Shell Size	A (max)	B (max)	C (max)	D Thread	E	F	G	H	J	d1 (min)	d2 (min)
09	20.90	10.60	2.50	M12*1-6g	23.80	18.26	15.09	3.25	5.49	16.66	13.11
11	20.90	10.60	2.50	M15*1-6g	26.20	20.62	18.26	3.25	4.93	20.22	15.88
13	20.90	10.60	2.50	M18*1-6g	28.60	23.01	20.62	3.25	4.93	23.42	19.05
15	20.90	10.60	2.50	M22*1-6g	31.00	24.61	23.01	3.25	4.39	26.59	23.01
17	20.90	10.60	2.50	M25*1-6g	33.30	26.97	24.61	3.25	4.93	30.96	25.81
19	20.90	10.60	2.50	M28*1-6g	36.50	29.36	26.97	3.25	4.93	32.94	28.98
21	20.10	11.40	3.20	M31*1-6g	39.70	31.75	29.36	3.25	4.93	36.12	32.16
23	20.10	11.40	3.20	M34*1-6g	42.90	34.93	31.75	3.91	6.15	39.29	34.93
25	20.10	11.40	3.20	M37*1-6g	46.00	38.10	34.93	3.91	6.15	42.47	37.69

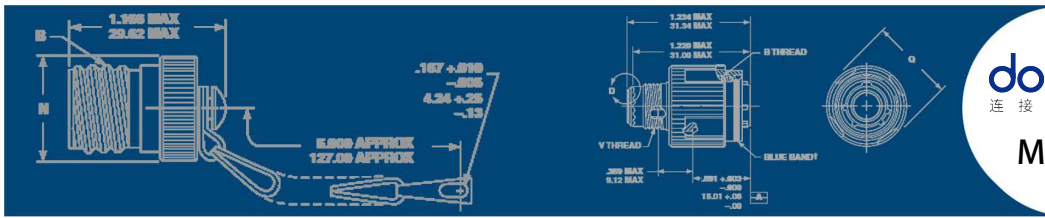


## Jam-nut Mounting Receptacle (D38999/24)

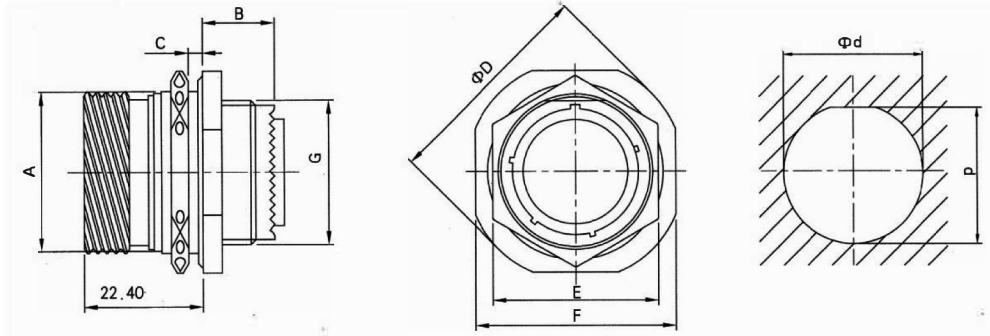


Shell Size	A	B (max)	C (max)	D (max)	E (max)	F	G	Thread	d	p
09	16.50	9.90	3.20	30.50	24.00	27.00	M12*1-6g	17.70	16.99	
11	19.30	9.90	3.20	35.20	27.00	31.80	M15*1-6g	20.88	19.53	
13	24.00	9.90	3.20	38.40	32.00	34.90	M18*1-6g	25.58	24.26	
15	27.20	9.90	3.20	41.60	36.00	38.10	M22*1-6g	28.80	27.53	
17	30.40	9.90	3.20	44.80	37.00	41.30	M25*1-6g	31.98	30.68	
19	33.40	9.90	3.20	49.30	41.00	46.00	M28*1-6g	35.15	33.86	
21	36.50	9.90	3.20	52.70	46.00	49.20	M31*1-6g	38.28	37.06	
23	39.70	9.90	3.20	55.90	50.00	52.40	M34*1-6g	41.50	40.24	
25	42.80	9.90	3.20	59.00	51.23	55.60	M37*1-6g	44.68	43.41	

## Receptacle, Thru-hole Type

Jam-nut Mounting Receptacle  
(D38999/24)

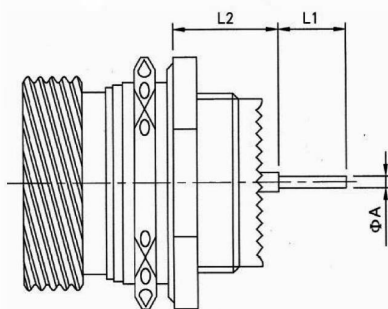

Square Flange Receptacle  
(D38999/20)



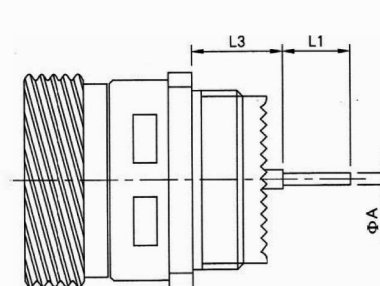







## Insert Availability

Shell Size- Inser Arrg	Military Shell Size Code	Service Rating	Total Contacts	Contact Size					
				22D	20	16	12	10	8
09-35		M	5	5					
09-98		I	3				3		
11-35		M	13	13					
11-98		I	6		6				
11-05		I	5		5				
11-04		I	4		4				
11-01		I	1				1		
11-99		I	7		7				
11-02		I	2			2			
13-35		M	22	22					
13-98		I	10		10				
13-04		I	4			4			
13-08		I	8		8				
13-50		M	5		4			1	
13-60		I	6		2	4			
15-35		M	37	37					
15-19		I	19		19				
15-18		I	18		18				
15-05		II	5			5			
15-97		II	12		8	4			
15-15		I	15		14	1			
17-35	E-35	M	55	55					
17-26	E-26	I	26		26				
17-06	E-6	I	6				6		
17-08	E-8	II	8			8			
17-99	E-99	II	23		21	2			
19-35	F-35	M	66	66					
19-32	F-32	I	32		32				
19-28		I	28		26	2			
19-11	F-11	II	11			11			
19-30		II	30		29	1			
19-45		M	45	45					

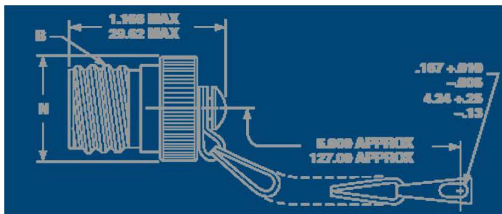

## Insert Availability


Shell Size- Inser Arrg	Military Shell Size Code	Service Rating	Total Contacts	Contact Size					
				22D	20	16	12	10	8
19-18		M	18	14					4
19-05			5		1			4	
19-93		I	32	24	6			2	
21-35	G-35	M	79	79					
21-41	G-41	I	41		41				
21-16	G-16	II	16			16			
21-39	G-39	I	39		37	2			
21-11	G-11	II	11				11		
21-27		I	27		27				
21-25		I	25		25				
21-24		I	24		24				
23-35	H-35	M	100	100					
23-55	H-55	I	55		55				
23-53	H-53	I	53		53				
23-36		I	36		36				
23-34		I	34		34				
23-32		I	32		32				
23-21	H-21	II	21			21			
23-97		I	16			16			
23-99		II	11			11			
25-35	J-35	M	128	128					
25-02		I	100	100					
25-61	J-61	I	61		61				
25-29		I	29		29				
25-24	J-24	I	24			12	12		
25-43	J-43	I	43		23	20			
25-19	J-19	I	19				19		
25-04	J-4	I	56		48	8			
25-11			11		2			9	
25-93		M	118	109		8		1	

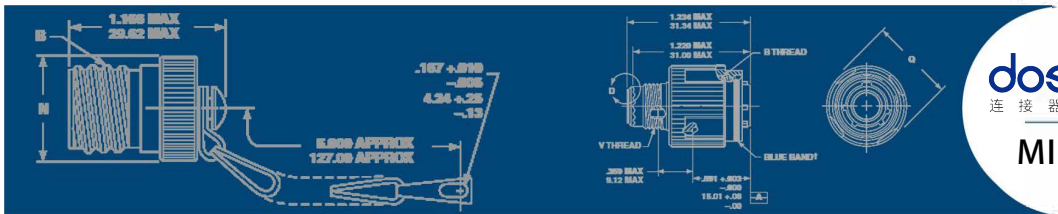


# Contact Arrangement




09-35 M




09-98 I




11-35 M



11-98 I




11-05 I




11-04 I




11-01 I



11-99 I




11-02 I




13-35 M




13-98 I




13-04 I



13-08 I




13-50 M




13-60 I




15-35 M




15-19 I




15-18 I




15-05 II




15-97 I




15-15 I




17-35 M




17-26 I




17-06 I




17-08 II




17-99 I




19-35 M




19-32 I




19-28 I




19-11 II




19-30 I




19-45 M



19-18 M






19-05




19-93 I


**MIL-DTL-38999 Series**

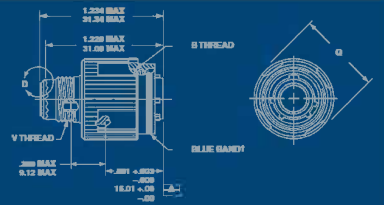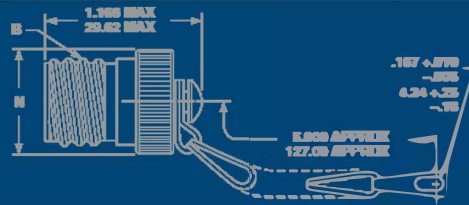


21-35 M




21-41 I




21-16 II




21-39 I




21-11 II




21-27 I




21-25 I




21-24 I




23-35 M




23-55 I




23-53 I




23-36 I




23-34 I




23-32 I




23-21 II




23-97 I




23-99 II




25-35 M




25-02 I




25-61 I




25-29 I




25-24 I




25-43 I




25-19 I



25-04 I





25-11




25-93 M

○ 22D#   ● 20#   ◐ 16#   ◑ 12#   ⊙ 10#   ● 8#

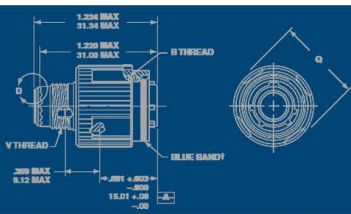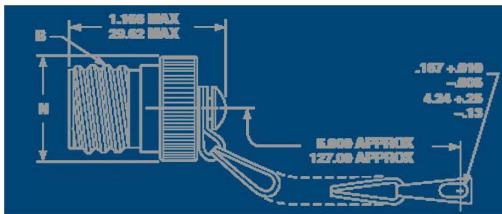


## Key Orientation

Face View of Receptacle

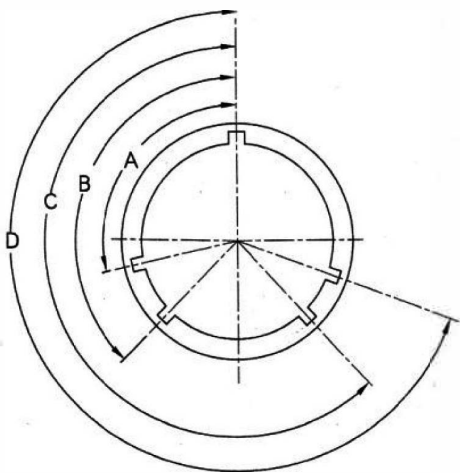

Face View of Plug

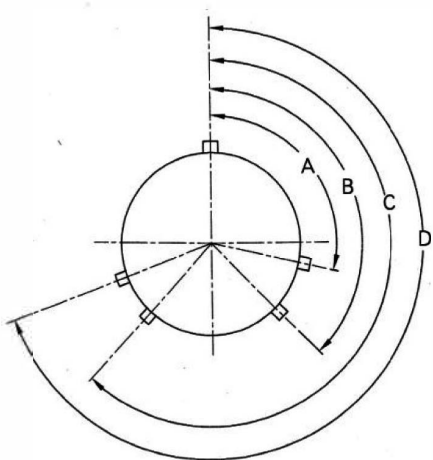



Shell Size	Orientation	N	A	B	C	D	E
9	A°	105	102	80	35	64	91
	B°	140	132	118	140	155	131
	C°	215	248	230	205	234	197
	D°	265	320	312	275	304	240
11	A°	95	113	90	53	119	51
	B°	141	156	145	156	146	141
	C°	208	182	195	220	176	184
	D°	236	292	252	255	298	242
13	A°	95	113	90	53	119	51
	B°	141	156	145	156	146	141
	C°	208	182	195	220	176	184
	D°	236	292	252	255	298	242
15	A°	95	113	90	53	119	79
	B°	141	156	145	156	146	153
	C°	208	182	195	220	176	197
	D°	236	292	252	255	298	272
17	A°	80	135	49	66	62	79
	B°	142	170	169	140	145	153
	C°	196	200	200	200	180	197
	D°	293	310	244	257	280	272
19	A°	80	135	49	66	62	79
	B°	142	170	169	140	145	153
	C°	196	200	200	200	180	197
	D°	293	310	244	257	280	272
21	A°	80	135	49	66	62	79
	B°	142	170	169	140	145	153
	C°	196	200	200	200	180	197
	D°	293	310	244	257	280	272
23	A°	80	135	49	66	62	79
	B°	142	170	169	140	145	153
	C°	196	200	200	200	180	197
	D°	293	310	244	257	280	272
25	A°	80	135	49	66	62	79
	B°	142	170	169	140	145	153
	C°	196	200	200	200	180	197



# MIL-DTL-38999 series III, IV back shell


## How to Order

	M85049/	38	-15	N	09	A
Basic series						
Type						
14 = Back nut						
16 = 90° elbow cable clamp						
18 = Straight cable clamp with shielding						
20 = Shielding back shell						
38 = Straight cable clamp						
39 = 90° elbow cable clamp with shielding						
69 = Heat shrinkable sleeve						
01 = Earthing and impaction						
06 = Spring thread-guard						
91 = Straight cable clamp (composite material)						
92 = 90° elbow cable clamp (composite material)						
Shell size						
09, 11, 13, 15, 17, 19, 21, 23, 25						
Finish						
W = Olive green cadmium plating						
N = Electroless nickel plating						
S = Stainless steel passivated						
A = Black anodized						
J = Olive green cadmium plating (composite material)						
M = Electroless nickel plating (composite material)						
Outlet diameter						
Omit = Standard size						
01 = 1.57 ~ 3.18 mm, 02 = 3.18 ~ 6.35 mm						
03 = 6.35 ~ 9.53 mm, 04 = 9.53 ~ 12.70 mm						
05 = 12.70 ~ 15.88 mm, 06 = 15.88 ~ 19.05 mm						
07 = 19.05 ~ 22.23 mm, 08 = 22.23 ~ 25.40 mm						
09 = 25.40 ~ 28.58 mm, 10 = 28.58 ~ 31.75 mm						
Length						
Omit = Standard length (64.4 mm)						
A = 89.8 mm						
B = 115.2 mm						
C = 140.6 mm						

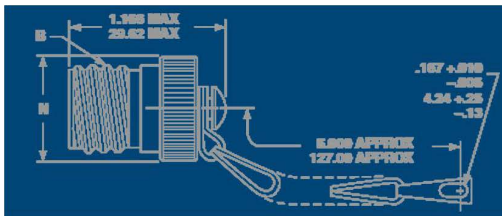


## Size for Back Shell

### Back nut (M85049/14)

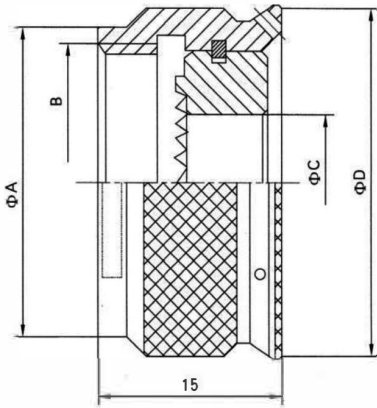


Shell No.	A	Thread B	C	D
09	15.2	M12*1	6.7	18.0
11	18.2	M15*1	9.9	21.0
13	21.2	M18*1	12.8	24.0
15	25.1	M22*1	16.0	28.0
17	28.1	M25*1	19.2	31.0
19	31.1	M28*1	21.4	34.0
21	34.0	M31*1	24.6	37.0
23	37.0	M34*1	27.7	40.0
25	40.0	M37*1	30.9	43.0

### Shielding back shell (M85049/20)

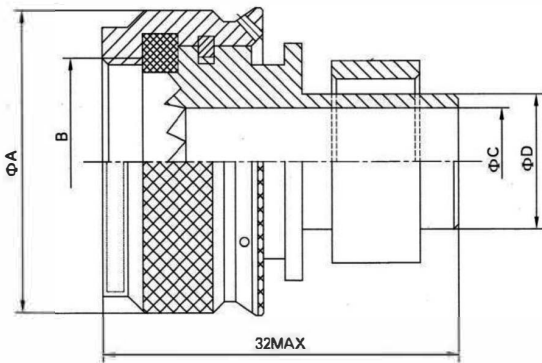

Shell	A	Thread B	C	D
0	18.	M12*1	6.5	8.8
1	21.	M15*1	8.6	12.65
1	24.	M18*1	10.90	12.95
1	28.	M22*1	14.10	16.00
1	31.	M25*1	17.25	19.30
1	34.	M28*1	20.40	22.61
2	37.	M31*1	23.60	25.65
2	40.	M34*1	26.40	28.70
2	43.	M37*1	28.40	30.53


### Heat shrinkable sleeve (M85049/69)

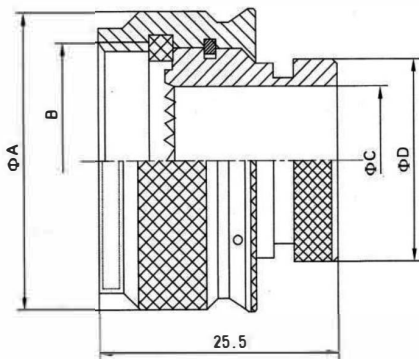

Shell No.	A	Thread B	C	D
09	18.0	M12*1	6.	13.5
11	21.0	M15*1	9.	15.3
13	24.0	M18*1	12.8	19.6
15	28.0	M22*1	16.0	21.2
17	31.0	M25*1	19.2	24.4
19	34.0	M28*1	21.4	26.4
21	37.0	M31*1	24.6	30.9
23	40.0	M34*1	27.7	34.4
25	43.0	M37*1	30.9	36.6




**Straight cable clamp (M85049/38)**

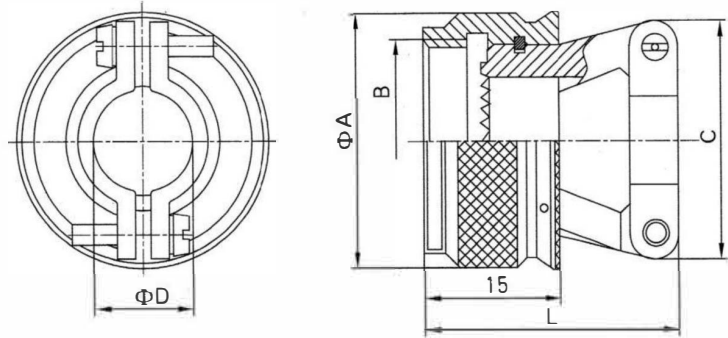


Shell	A (max)	Thread B	C (max)	D (min)	D (max)	L (max)
0	18.0	M12*1	20.0	2.49	5.94	27.0
1	21.0	M15*1	21.0	3.87	5.94	28.5
1	24.0	M18*1	23.4	4.83	8.33	30.0
1	28.0	M22*1	26.6	6.60	11.61	31.5
1	31.0	M25*1	30.6	7.19	15.60	33.5
1	34.0	M28*1	34.0	8.26	16.10	36.6
2	37.0	M31*1	35.8	8.71	17.73	39.8
2	40.0	M34*1	39.0	9.68	20.90	42.9
2	43.0	M37*1	40.6	10.62	21.66	45.0


**90° elbow cable clamp with shielding (M85049/39)**

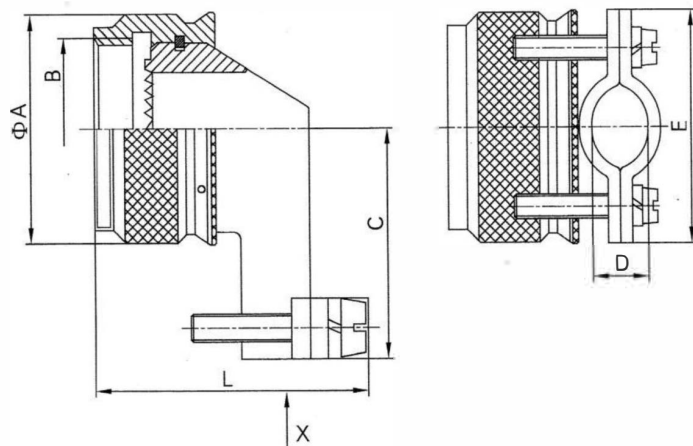

Shell No.	A	Thread	C	D (min)	D (max)	E (max)	L (max)
09	18.0	M12*1	20.6	2.49	5.94	21.6	29.5
1	21.0	M15*1	22.0	3.87	5.94	22.8	29.5
13	24.0	M18*1	23.6	4.83	8.33	26.0	31.9
15	28.0	M22*1	25.2	6.60	11.61	29.0	35.1
17	31.0	M25*1	26.8	7.19	15.61	30.6	39.1
19	34.0	M28*1	31.3	8.26	16.10	37.0	41.5
21	37.0	M31*1	32.9	8.71	17.73	39.0	43.3
23	40.0	M34*1	34.5	9.68	20.90	41.0	46.5
25	43.0	M37*1	36.1	10.62	21.66	42.0	47.1

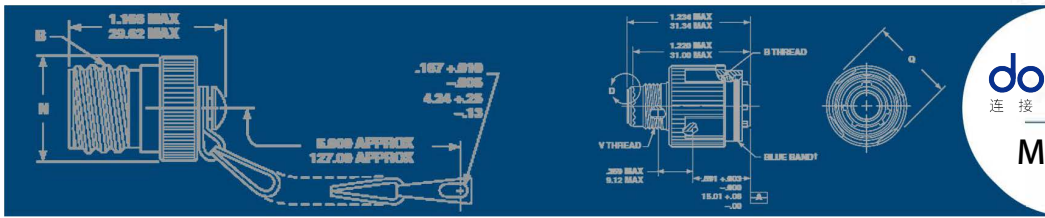


**90° elbow cable clamp (M85049/16)**


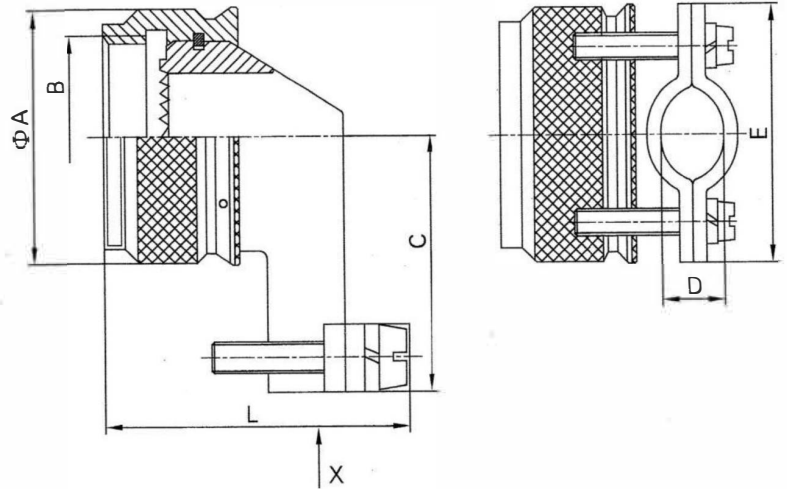


Shell	A	Thread B	C (max)	D (min)	D (max)	E (max)	L (max)
0	19.0	M12*1	20.0	2.85	6.71	21.0	25.9
1	22.0	M15*1	21.5	6.00	9.96	26.5	29.2
1	25.1	M18*1	23.0	8.45	12.85	31.5	32.0
1	29.0	M22*1	25.0	12.00	16.03	36.5	35.2
1	32.1	M25*1	27.0	11.10	19.20	31.0	36.4
1	35.1	M28*1	28.5	13.75	21.46	37.0	40.7
2	38.1	M31*1	29.5	19.30	24.64	35.0	43.8
2	41.1	M34*1	31.0	21.40	27.81	35.0	43.0
2	44.1	M37*1	33.0	23.50	30.99	37.0	44.2


**Earthing and impaction (M85049/01)**

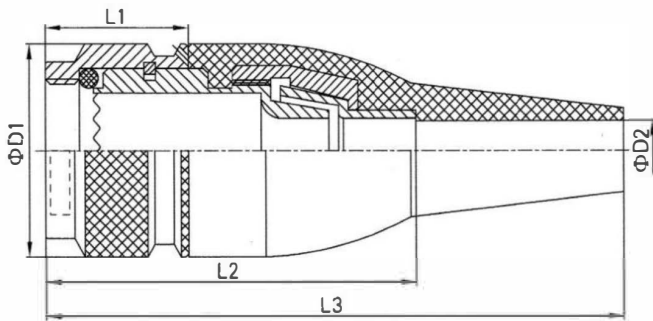

P/N	D1	D2	L1	L2	L3
M85049 01-08N	18.0	7.0	14.8	37.0	53.0
M85049 01-10N	21.0	10.0	14.8	37.0	53.0
M85049 01-12N	24.0	13.0	14.8	37.0	53.0
M85049 01-14N	28.0	15.0	14.8	40.0	73.0
M85049 01-16N	31.0	18.0	14.8	40.0	73.0
M85049 01-18N	34.0	20.0	14.8	40.0	73.0
M85049 01-20N	37.0	23.5	14.8	45.0	73.0
M85049 01-22N	40.0	26.5	14.8	45.0	73.0
M85049 01-24N	43.0	29.0	14.8	45.0	73.0

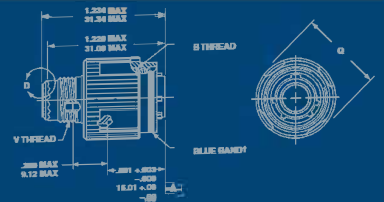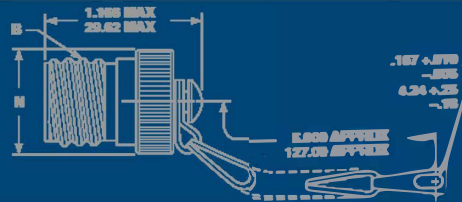


**Protecting cable by spring (M85049/06)**

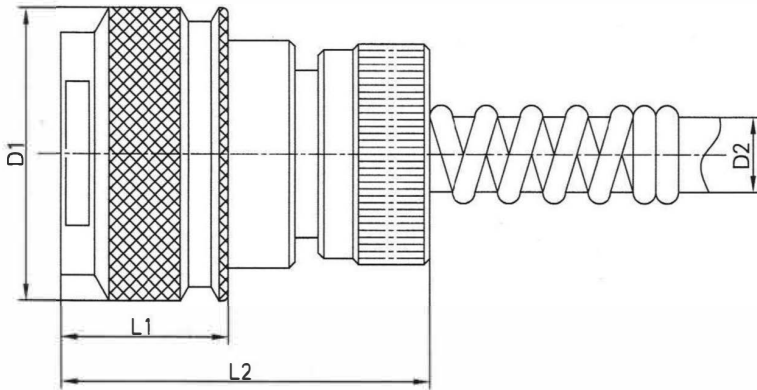


P/	D1	D2	L1	L2
M85049 01-09N	18.0	7.0	14.8	37.0
M85049 01-11N	21.0	10.0	14.8	37.0
M85049 01-13N	24.0	13.0	14.8	37.0
M85049 01-15N	28.0	15.0	14.8	40.0
M85049 01-17N	31.0	18.0	14.8	40.0
M85049 01-19N	34.0	20.0	14.8	40.0
M85049 01-21N	37.0	23.5	14.8	45.0
M85049 01-23N	40.0	26.5	14.8	45.0
M85049 01-25N	43.0	29.0	14.8	45.0


**Straight cable clamp (M85049/38-NB)**

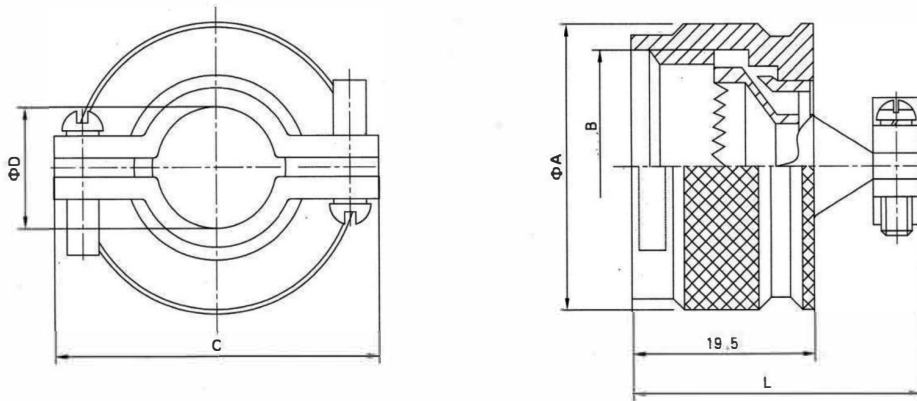

P/	A	Thread	C	D (min)	D (max)	L
M85049 38-09N	16.4	M12*1	18.6	3.	5.	29.2
M85049 38-11N	19.2	M15*1	20.6	5.	7.	29.2
M85049 38-13N	23.0	M18*1	24.5	7.	11.	29.2
M85049 38-15N	25.7	M22*1	26.0	9.	12.9	29.8
M85049 38-17N	29.0	M25*1	33.0	12.8	17.0	31.0
M85049 38-19N	31.5	M28*1	36.3	13.2	17.9	32.0
M85049 38-21N	34.7	M31*1	39.0	14.8	21.1	32.0
M85049 38-23N	37.5	M34*1	41.4	16.4	24.3	32.0
M85049 38-25N	41.0	M37*1	44.5	18.0	27.5	32.0

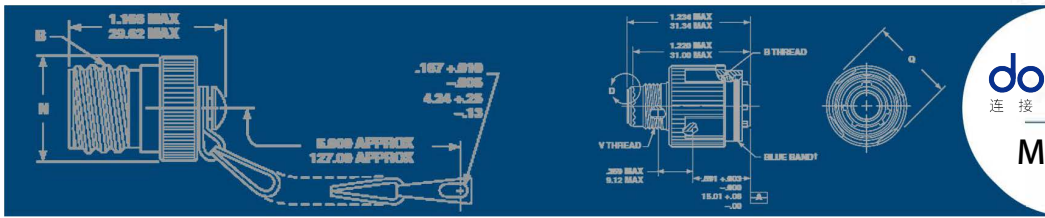

**Straight cable clamp with shielding (M85049/18)**

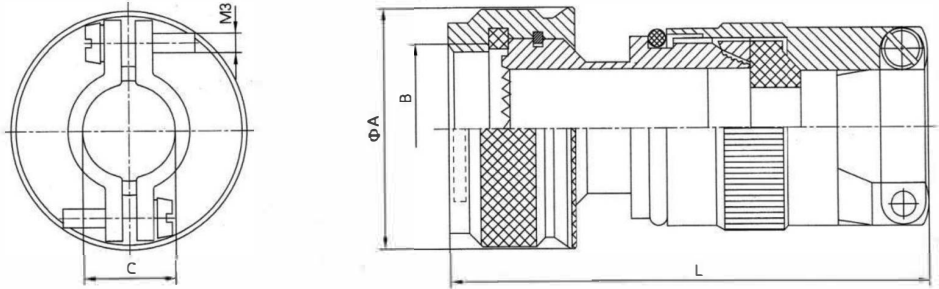




Shell No.	Number for hole of cable	A	Thread B
09	01 ~ 02	19	M12*1
11	01 ~ 03	22	M15*1
13	02 ~ 04	25.1	M18*1
15	02 ~ 05	29	M22*1
17	02 ~ 06	32	M25*1
19	03 ~ 07	35	M28*1
21	03 ~ 08	38	M31*1
23	03 ~ 09	41.1	M34*1
25	04 ~ 10	41.1	M37*1

Number for hole of cable	Diameter for
01	1.57 ~ 3.18
02	3.18 ~ 6.35
03	6.35 ~ 9.53
04	9.53 ~ 12.7
05	12.7 ~ 15.88
06	15.88 ~ 19.05
	19.05 ~ 22.23
08	22.23 ~ 25.40
09	25.40 ~ 28.58
10	28.58 ~ 31.75

Shell No.	Number for length	L
09 ~ 25	Standard (may omit)	64.4
09 ~ 25	A	89.8
15 ~ 25	B	115.2
21 ~ 25	C	140.


**Shielding back shell (M85049/20-J)**

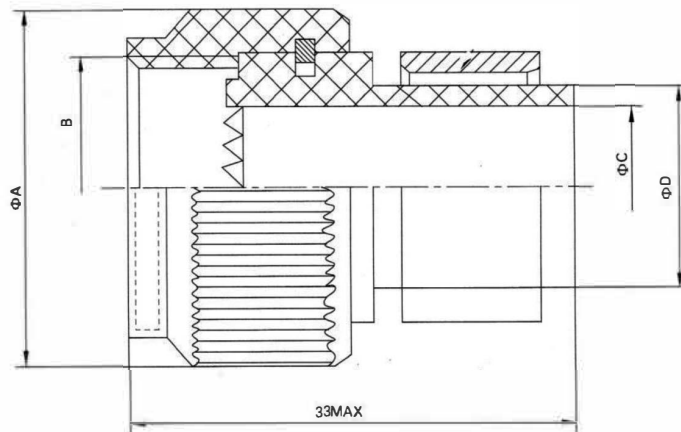

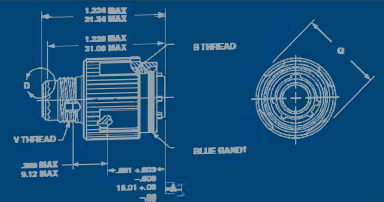
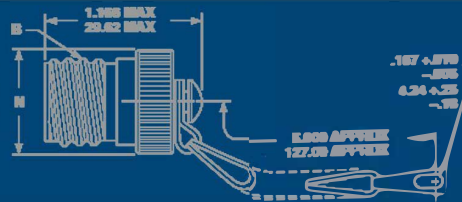


P/	A	Thread B	C	D
M85049 20-09J	21.8	M12*1	6.73	12.65
M85049 20-11J	25.0	M15*1	8.71	12.95
M85049 20-13J	29.5	M18*1	11.10	16.00
M85049 20-15J	32.5	M22*1	14.27	19.30
M85049 20-17J	35.5	M25*1	17.45	22.61
M85049 20-19J	38.5	M28*1	20.62	25.65
M85049 20-21J	41.5	M31*1	23.80	28.70
M85049 20-23J	45.0	M34*1	26.57	30.53
M85049 20-25J	48.0	M37*1	28.58	34.52


**Straight cable clamp (M85049/91-J)**

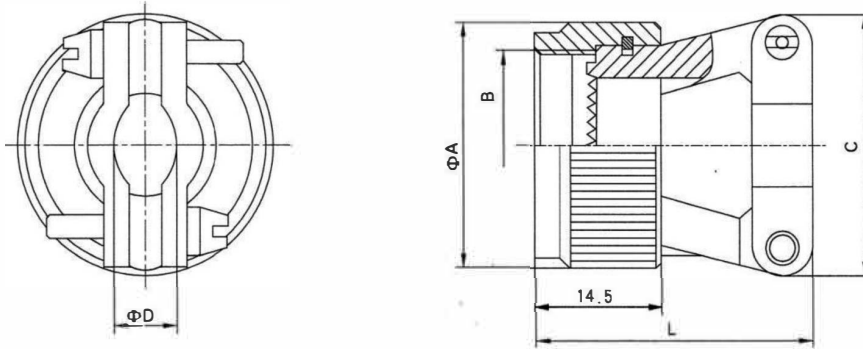

Shell No.	A (max)	Thread B	C (max)	D (min)	D (max)	L (max)
0	21.8	M12*1	20.0	4.00	5.94	27.0
1	25.0	M15*1	20.0	4.00	5.94	28.5
1	29.5	M18*1	23.4	4.83	8.33	30.0
1	32.5	M22*1	26.6	6.60	11.61	31.5
1	35.5	M25*1	30.6	7.19	15.60	33.5
1	38.5	M28*1	34.0	8.26	16.10	36.6
2	41.5	M31*1	35.8	8.71	17.73	39.8
2	45.0	M34*1	39.0	9.68	20.90	42.9
2	48.0	M37*1	40.6	10.62	21.66	45.0

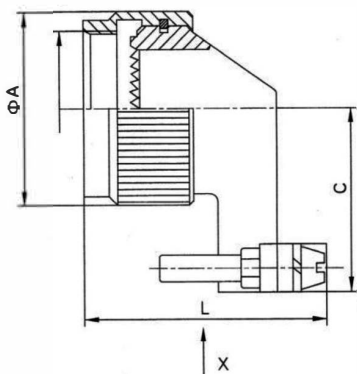

**90° elbow cable clamp (M85049/92-J)**

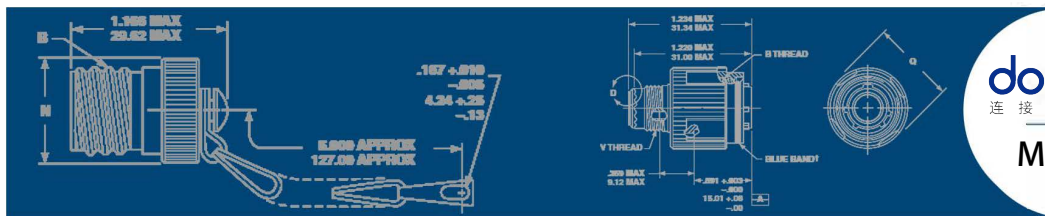

## MIL-DTL-38999 Series

Shell No.	A (max)	Thread B	C (max)	D (min)	D (max)	L (max)
09	21.8	M12*1	20.6	2.49	5.94	29.5
11	25.0	M15*1	22.0	3.87	5.94	29.5
13	29.5	M18*1	23.6	4.83	8.33	31.9
15	32.5	M22*1	25.2	6.60	11.61	35.1
17	35.5	M25*1	26.8	7.19	15.60	39.1
19	38.5	M28*1	31.3	8.26	16.10	41.5
21	41.5	M31*1	32.9	8.71	17.73	43.3
23	45.0	M34*1	34.5	9.68	20.90	46.5
25	48.0	M37*1	36.1	10.62	21.66	47.1

